

B200004



▶ 主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) :—
- ▶ 适用基板厚度 (Applicable PC board thickness) :0.8mm~1.6mm
- ▶ 温度范围 (Temperature range) : -25℃~+85℃
- ▶ 额定电压 (Voltage rating) :250V AC, DC
- ▶ 额定电流 (Current rating) :2A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) :800V AC/minute

材料及电镀规格 Material and Finish


型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
插座 WAFER	塑胶 HOUSING	PA66 UL94V-0	N/A
	针PIN	黄铜 Barss	镀锡 Tin-plated

产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20

WAFER

B200004-1

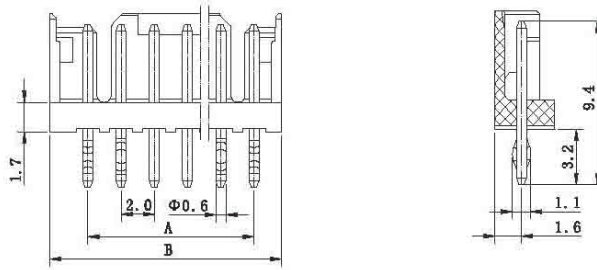

WAFER

极数 Circuits	型号 Type	尺寸(Dimensions)mm		备注型号 P. S. Type
		A	B	
2	B200004-1-02	2.0	5.9	6292161-2
3	B200004-1-03	4.0	7.9	6292161-3
4	B200004-1-04	6.0	9.9	6292161-4
5	B200004-1-05	8.0	11.9	6292161-5
6	B200004-1-06	10.0	13.9	6292161-6
7	B200004-1-07	12.0	15.9	6292161-7
8	B200004-1-08	14.0	17.9	6292161-8
9	B200004-1-09	16.0	19.9	6292161-9
10	B200004-1-10	18.0	21.9	6292161-10
11	B200004-1-11	20.0	23.9	6292161-11
15	B200004-1-15	28.0	31.9	6292161-15