


B200023

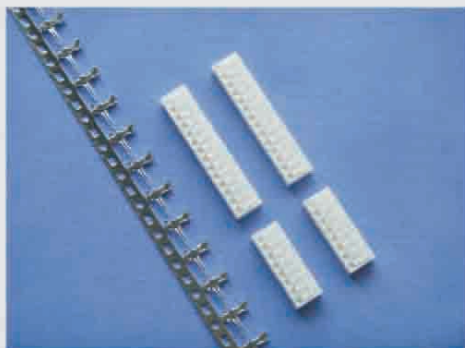

▶ 主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) : AWG28#~24#
- ▶ 适用基板厚度 (Applicable PC board thickness) : 0.8mm~1.6mm
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 2A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 800V AC/minute

材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	磷青铜 Phosphor bronze	0.2mm	镀锡 Tin-plated


产品尺寸图 Product size chart

单位: mm 一般公差: ± 0.20



TERMINAL

B200023-4

YBAT200


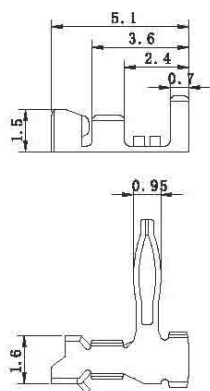


安装尺寸 (Mounting measurement)



HOUSING

B200023-2

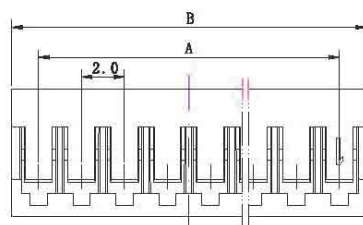

HOUSING

极数 Circuits	型号 Type	尺寸 (Dimensions) mm		备注型号 P. S. Type
		A	B	
2	B200023-2-02	2.0	4.5	YBNH200-02
3	B200023-2-03	4.0	6.5	YBNH200-03
4	B200023-2-04	6.0	8.5	YBNH200-04
5	B200023-2-05	8.0	10.5	YBNH200-05
6	B200023-2-06	10.0	12.5	YBNH200-06
7	B200023-2-07	12.0	14.5	YBNH200-07
8	B200023-2-08	14.0	16.5	YBNH200-08
9	B200023-2-09	16.0	18.5	YBNH200-09
10	B200023-2-10	18.0	20.5	YBNH200-10
11	B200023-2-11	20.0	22.5	YBNH200-11
15	B200023-2-15	28.0	30.5	YBNH200-15