

# B250016



### ▶ 主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) : --
- ▶ 适用基板厚度 (Applicable PC board thickness) : 0.8mm~1.6mm
- ▶ 温度范围 (Temperature range) : -25℃~+85℃
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 2A AC, DC
- ▶ 接触电阻 (Contact resistance) :  $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) :  $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 1000V AC/minute

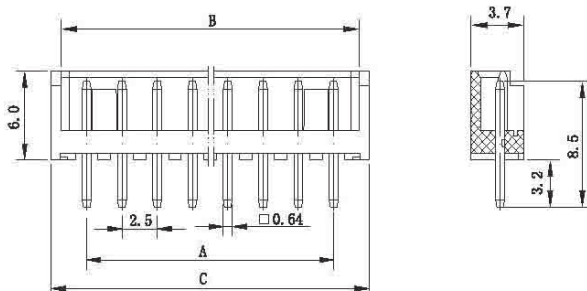
### 材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
插座 WAFER	塑胶 HOUSING	PA66 UL94V-0	N/A
	针PIN	黄铜 Brass	镀锡 Tin-plated

### 产品尺寸图 Product size chart

 单位: mm 一般公差:  $\pm 0.20$ 

### WAFER

B250016-1 6602V25003


### WAFER

极数 Circuits	型号 Type	尺寸 (Dimensions) mm			备注型号 P. S. Type
		A	B	C	
2	B250016-1-02	2.5	6.14	7.5	6602V25003-A
3	B250016-1-03	5.0	8.64	10.0	6602V25003-B
4	B250016-1-04	7.5	11.14	12.5	6602V25003-C
5	B250016-1-05	10.0	13.64	15.0	6602V25003-D
6	B250016-1-06	12.5	16.14	17.5	6602V25003-E
7	B250016-1-07	15.0	18.64	20.0	6602V25003-F
8	B250016-1-08	17.5	21.14	22.5	6602V25003-G
9	B250016-1-09	20.0	23.64	25.0	6602V25003-H
10	B250016-1-10	22.5	26.14	27.5	6602V25003-I
11	B250016-1-11	25.0	28.64	30.0	6602V25003-J
12	B250016-1-12	27.5	31.14	32.5	6602V25003-K
13	B250016-1-13	30.0	33.64	35.0	6602V25003-L
14	B250016-1-14	32.5	36.14	37.5	6602V25003-M
15	B250016-1-15	35.0	38.64	40.0	6602V25003-N