


# B254003

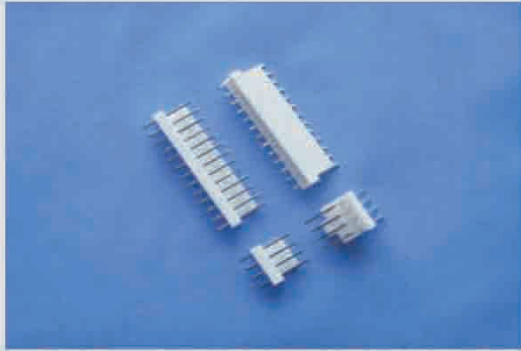

### 主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) : —
- ▶ 适用基板厚度 (Applicable PC board thickness) : 1.2mm~1.6mm
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 2A AC, DC
- ▶ 接触电阻 (Contact resistance) :  $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) :  $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 1000V AC/minute

### 材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
插座 WAFER	塑胶 HOUSING	PA66 UL94V-0	N/A
	针PIN	黄铜 Brass	镀锡 Tin-plated





### 产品尺寸图 Product size chart

 单位: mm 一般公差:  $\pm 0.20$ 

## WAFER

B254003-1

B254003-1W



## WAFER

极数 Circuits	型号 Type		尺寸 (Dimensions) mm		备注型号 P. S. Type	
			A	B		
2	B254003-1-02	B254003-1W-02	2.5	7.5	640456-2	640456-2W
3	B254003-1-03	B254003-1W-03	5.0	10.0	640456-3	640456-3W
4	B254003-1-04	B254003-1W-04	7.5	12.5	640456-4	640456-4W
5	B254003-1-05	B254003-1W-05	10.0	15.0	640456-5	640456-5W
6	B254003-1-06	B254003-1W-06	12.5	17.5	640456-6	640456-6W
7	B254003-1-07	B254003-1W-07	15.0	20.0	640456-7	640456-7W
8	B254003-1-08	B254003-1W-08	17.5	22.5	640456-8	640456-8W
9	B254003-1-09	B254003-1W-09	20.0	25.0	640456-9	640456-9W
10	B254003-1-10	B254003-1W-10	22.5	27.5	640456-10	640456-10W
11	B254003-1-11	B254003-1W-11	25.0	30.0	640456-11	640456-11W
16	B254003-1-16	B254003-1W-16	37.5	42.5	640456-16	640456-16W