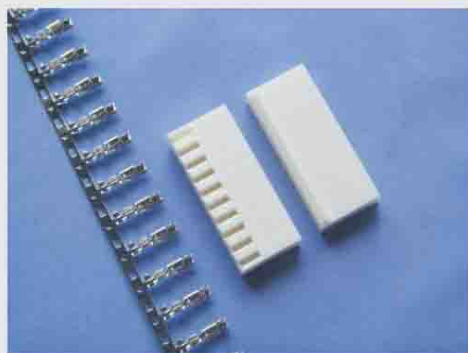


B396007



▶ 主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) : AWG22#~18#
- ▶ 适用基板厚度 (Applicable PC board thickness) : 1.6mm
- ▶ 温度范围 (Temperature range) : -25℃~+85℃
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 5A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 1500V AC/minute



材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94Y-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.3mm	镀锡 Tin-plated



产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20

TERMINAL

B396007-4 8911411-Y


HOUSING

B396007-2 HSG421


HOUSING

极数 Circuits	型号 Type	尺寸 (Dimensions) mm		备注型号 P. S. Type
		A	B	
2	B396007-2-02	3.96	7.92	HSG421-02P
3	B396007-2-03	7.92	11.88	HSG421-03P
4	B396007-2-04	11.88	15.84	HSG421-04P
5	B396007-2-05	15.84	19.80	HSG421-05P
6	B396007-2-06	19.80	23.76	HSG421-06P
7	B396007-2-07	23.76	27.72	HSG421-07P
8	B396007-2-08	27.72	31.68	HSG421-08P
9	B396007-2-09	31.68	35.64	HSG421-09P
10	B396007-2-10	35.64	39.60	HSG421-10P
11	B396007-2-11	39.60	43.56	HSG421-11P
12	B396007-2-12	43.56	47.52	HSG421-12P
13	B396007-2-13	47.52	51.48	HSG421-13P