
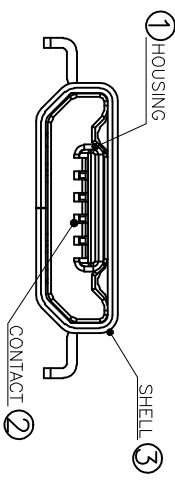
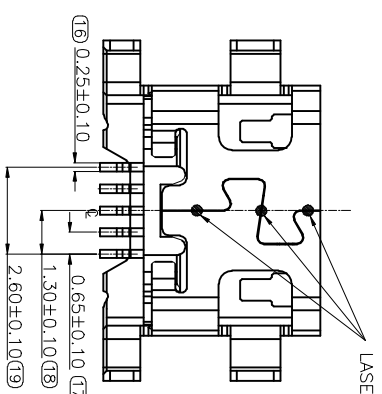
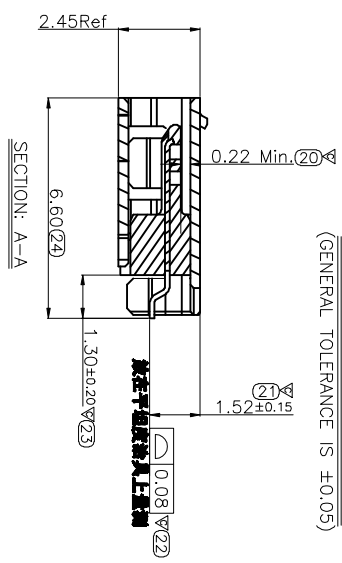
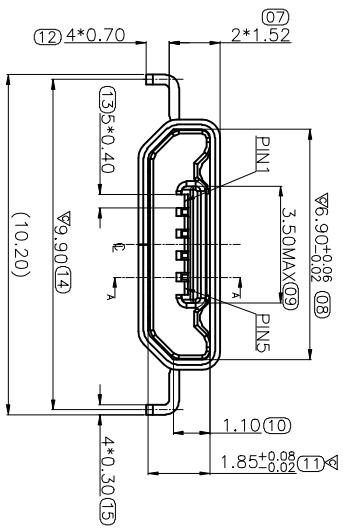
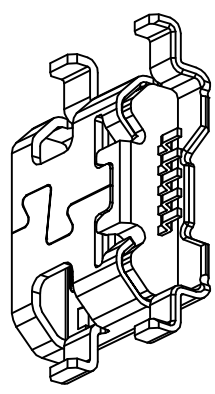


REV	ECH NO	DESCRIPTION	DATE	APPD
A	PECN1209008	繪圖發行	2012.09.15	李林虹
B	PECN1503002	電腦輔助繪圖進行修改	2015.03.09	周冬芳
C	PECN1506021	零件生產製造圖	2015.06.25	周冬芳
D	PECN1603021	修改PCB LAYOUT	2016.03.30	王秋林

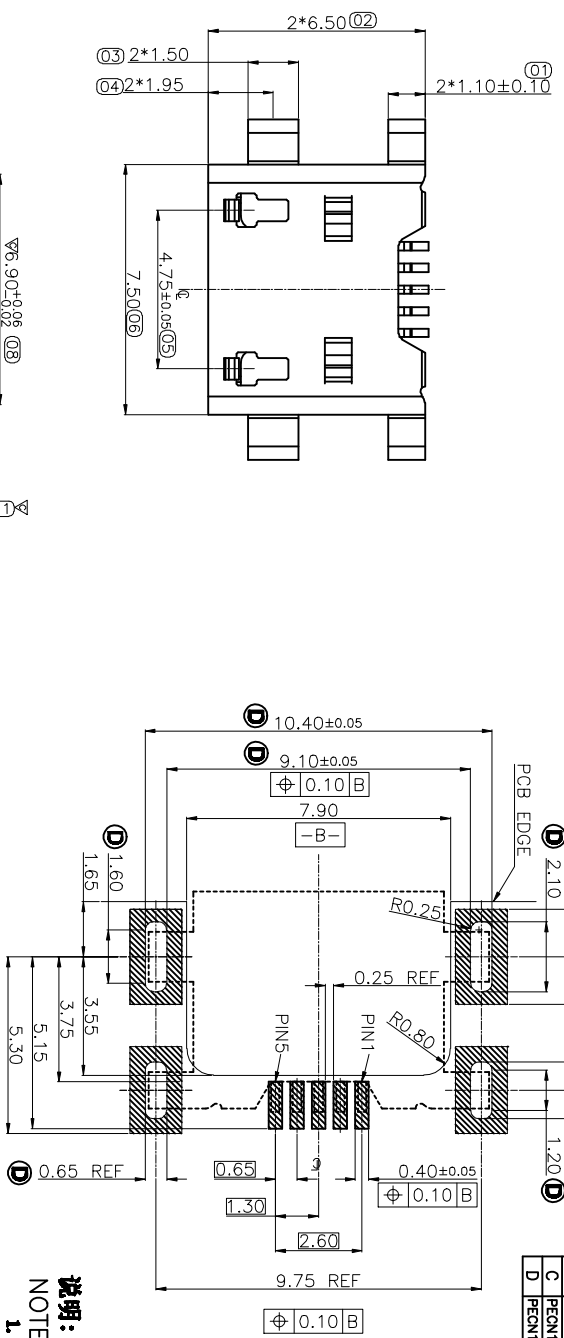

ITEM	PART NAME	PART No.
③	SHELL	3.06238-000-SR6
②	CONTACT	3.03070-005-9R3
①	HOUSING	3.062M0-005-9Y1

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE IS ±0.05)

说明:

1. 塑胶材料: LCP, COLOR: BLACK;
HOUSING MATERIAL: LCP, COLOR: BLACK;
端子材料: 镀锡, 镀层50"120μ",
接触区镀层50μ, 焊锡区镀层10"10μ;
CONTACT MATERIAL: NICKEL AND COPPER;
NICKEL 50~120μ" UNDER PLATED OVER ALL;
Pd-Ni30μ", GOLD PLATED AT CONTACT AREA;
AU 1U"Min PLATED AT SOLDER TAIL AREA;
外壳材料: 不锈钢, 镀层50"120μ", 锡上镀层90"150μ";
SHELL MATERIAL: STAINLESS STEEL,
NICKEL 50~120μ" UNDER PLATED OVER ALL;
MATE TIN 80~150μ" ON THE ALL.
2. 产品性能:
PERFORMANCE:
2.1 额定电压: 使用交流电压100V, 电流1A, 保持1分钟,
Applied AC 100V for 1 minute 1mA
2.2 接触电阻: 4mΩ Max
CONTACT RESISTANCE: 40mΩM Max.
2.3 绝缘电阻: 500MΩ Min
INSULATION RESISTANCE: 500MΩM Min.
2.4 插入力: 插入力25N最大, 拔出力10N最小
MATING AND UNMATING FORCE:
MATING FORCE25N Max, UNMATING FORCN Min.
2.5 使用寿命: 10000次
DURABILITY: 10000 CYCLES
3. 标有▽的为重点尺寸; 标有⊕的尺寸为加严公差之尺寸;
MARK ▽ THE KEY SIZE, MARK ⊕ FAI.

EXTEND USE		TITLE		DWG NO	
MICRO USB CONNECTOR	UNIT	MICRO USB CONNECTOR		C-3.062A4	
GENERAL TOLERANCE	mm	CUST DRAWING			
±0.30		APPD	LinHongTan	2/30'16	P/N:
±0.25		CHD	John.Wang	2/30'16	3.062A4-005-9RO
±0.20		QTY			SHEET SCALE
±0.10		FINISHED			1/1
		DRN	Quanyong.Wang	2/30'16	REV
					D

