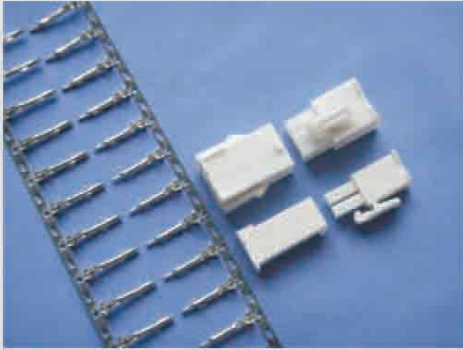


B420002

FL



- ▶ 主要技术特性 (Main Specifications)
- ▶ 适用导线规格 (Applicable wire) : AWG24#~20#
- ▶ 适用基板厚度 (Applicable PC board thickness) : --
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 300V AC, DC
- ▶ 额定电流 (Current rating) : 7A AC, DC
- ▶ 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 1500V AC/minute

材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.2mm	镀锡 Tin-plated

产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20



TERMINAL

B420002-3

FL-A

B420002-4

FL-Y



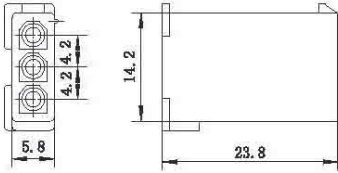
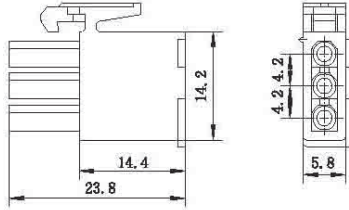
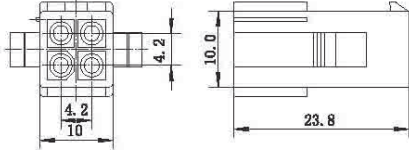
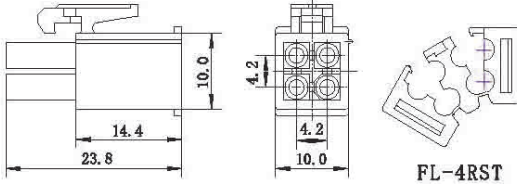
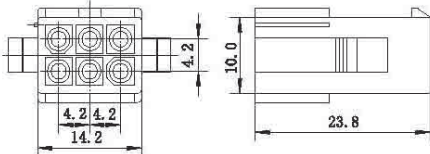
HOUSING

极数 Circuits	公端胶座 Male Housing (for pin contact)	母端胶座 Female Housing (for socket contact)
1	B420002-1-01F FLR-01VF 	B420002-2-01 FLP-01V
2	B420002-1-02F FLR-02VF 	B420002-2-02 FLP-02V

B420002

FL

HOUSING

极数 Circuits	公端胶座 Male Housing (for pin contact)	母端胶座 Female Housing (for socket contact)
3	<p data-bbox="275 424 588 453">B420002-1-03F FLR-03VF</p> 	<p data-bbox="813 424 1104 453">B420002-2-03 FLP-03V</p> 
4	<p data-bbox="275 800 571 829">B420002-1-04 FLR-04V</p> 	<p data-bbox="813 800 1104 829">B420002-2-04 FLP-04V</p>  <p data-bbox="1229 1061 1323 1094">FL-4RST</p>
6	<p data-bbox="275 1176 571 1205">B420002-1-06 FLR-06V</p> 	<p data-bbox="813 1176 1104 1205">B420002-2-06 FLP-06V</p> 