

B800003



► 主要技术特性 (Main Specifications)

- 适用导线规格 (Applicable wire) : AWG22#~18#
- 适用基板厚度 (Applicable PC board thickness) : --
- 温度范围 (Temperature range) : -25°C~+85°C
- 额定电压 (Voltage rating) : 250V AC, DC
- 额定电流 (Current rating) : 3A AC, DC
- 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstanding voltage) : 1000V AC/minute

材料及电镀规格 Material and Finish


型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.25mm	镀锡 Tin-plated

产品尺寸图 Product size chart

 单位: mm 一般公差: ± 0.20


TERMINAL

B800003-4 YDT236




HOUSING


B800003-2-01 YDH236-01E




B800003-2-01A YDH236-01P




B800003-5-01 YDH236-H01ERT



B800003-2-02 YDH236-02E

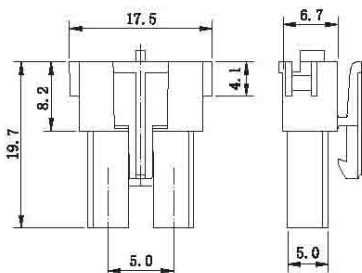

B800003-2-02A YDH236-02P

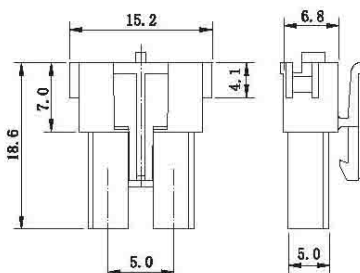

B800003-5-02 YDH236-H02ERT

